



30W~150W



180W~300W

LED Street Light



30W, 50W, 70W, 90W, 100W, 120W, 150W,
180W, 200W, 240W, 300W

DIMENSIONS

30W~150W

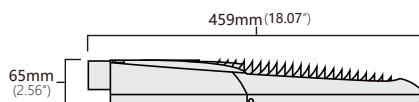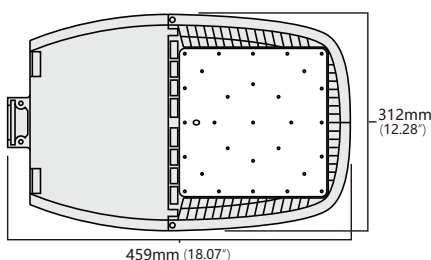


180W~300W

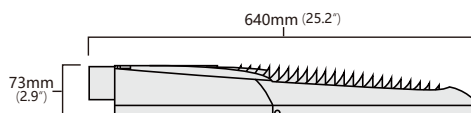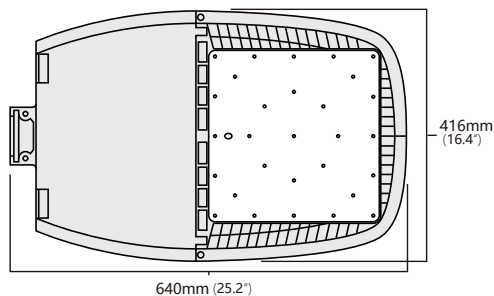

ITEM	MODEL NO.	RATED VOLTAGE	WATTAGE
1	ST-A2LAL30W	100-277v AC / 277-480v AC (Optional)	30W
2	ST-A2LAL50W	100-277v AC / 277-480v AC (Optional)	50W
3	ST-A2LAL70W	100-277v AC / 277-480v AC (Optional)	70W
4	ST-A2LAL90W	100-277v AC / 277-480v AC (Optional)	90W
5	ST-A2LAL100W	100-277v AC / 277-480v AC (Optional)	100W
6	ST-A2LAL120W	100-277v AC / 277-480v AC (Optional)	120W
7	ST-A2LAL150W	100-277v AC / 277-480v AC (Optional)	150W
8	ST-A2LAL180W	100-277v AC / 277-480v AC (Optional)	180W
9	ST-A2LAL200W	100-277v AC / 277-480v AC (Optional)	200W
10	ST-A2LAL240W	100-277v AC / 277-480v AC (Optional)	240W
11	ST-A2LAL300W	100-277v AC / 277-480v AC (Optional)	300W

PHOTOMETRICS

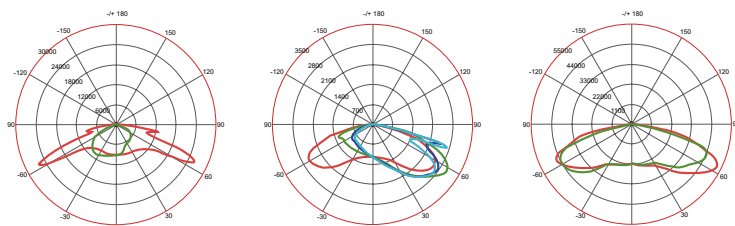

OPTICAL SPECS

Max System Efficacy 160 Lm/W

CCT 30K / 40K / 50K

CRI >70Ra

ELECTRICAL SPECS

Input Voltage 100~277v AC / 277-480v AC (Optional)

Power Frequency 50 / 60 Hz

Power Factor >0.95

Dimming Function DALI

SPD 10KV

ELECTRICAL SPECS

Fixture Material Glass Cover / PC(Lens) / Aluminum (Body)

Driver Inventronics EUM

Chips Philips 3030

Ingress Protection IP66 Weatherproof

Lifespan ≥ 100,000 Hours

Operating Temperature -40~122°F (-40~50°C)

Operating Humidity 10~90%RH

FIXTURE OPTIONS

Working with several lighting control